

GB


Connection instructions for RJ45 socket cat. 5 Enhanced and cat.6 with AVE connector:

44..027C5E (unshielded version)
44..027C6 (unshielded version)


Customizable label





- 1) Strip approximately 30mm of the cable jacket and separate to 4 pair each.




- 2) Follow the direction on the color-coding sticker to position T568A or T568B wiring, separate a little space on proper position and insert the wire pair into each slot.




- 3) Use the proper tool to press and cut off each conductor; remove eventual shreds of the conductor.




4) Insert the caps to fix these wires.





5) Hook the connector to the cover before in the lower part.



RELEASE THE CONNECTOR FROM THE COVER

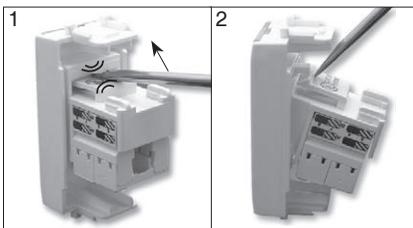

COLORS OF CONDUCTORS VALID FOR BOTH SOCKETS

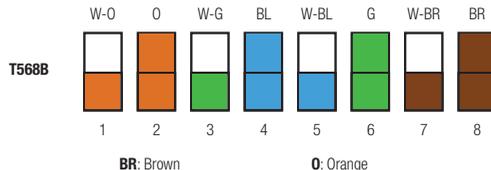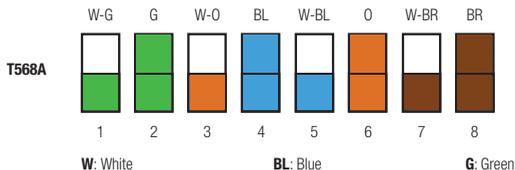

C.525 - 04 - 020712

IMPORTANT NOTES:

- Products should be sold in their original packaging. Otherwise, the retailer and/or installer is obliged to follow, as well as to communicate to the user, the instructions for use which are supplied with the product and/or are published on the website www.ave.it as well as in the current product catalog.
- AVE products are installation products
- Products must be installed by trained professionals in compliance with the installation regulations
- Once the product is unpacked, make sure that the appliance is undamaged. Do not use the appliance if there is any doubt, but contact a qualified technician
- Even before unpacking, the appliance should be handled with care and stored in a dry place at temperatures between -5°C and $+40^{\circ}\text{C}$
- Before carrying out any maintenance on the appliance, cut off the mains power
- Special attention should be paid to the preparation of the cable terminals to be inserted into the appliance terminals so as to maintain sufficient isolation distance between contacts
- When tightening the terminal screws, special care should be taken to avoid overheating which could start a fire or damage the cables.
- The product must be used in dry, dust-free areas
- Suitable products must be used in any other conditions
- There is a risk of electric shock or malfunction of the device if not handled properly.
- Install products and accessories according to the prescriptions in the catalogue and the instructions sheet and in compliance with specific standards and rules
- Warranty certificate for a specific product, which specifies the warranty period and conditions in accordance with local regulations, is issued by the seller at the moment of sale of product

The manufacturer's warranty: The 5 year warranty applies only to damaged or malfunctioning products caused by manufacturer's negligence, taking into account the rights and obligations prescribed by law (art. 1490, 1512 C.C., DL 24/2002, Directive 1999/44/CE, art. 1519 C.C.). The defect must be notified within 2 month from the date it was discovered. Five years are intended from the date of delivery of the product to the final customer.

